

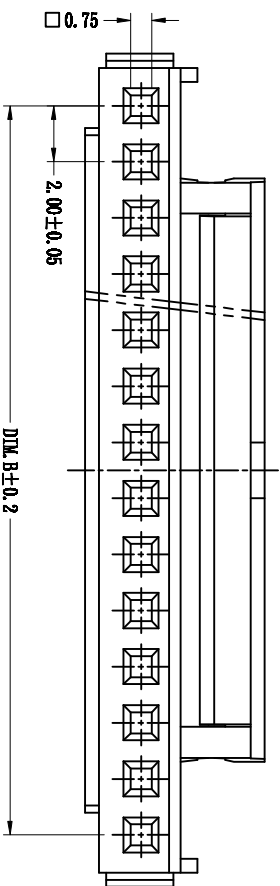





No. of Contact	DIMENSIONS	
	DIW A	DIW B
02	4.70	2.00
03	6.70	4.00
04	8.70	6.00
05	10.70	8.00
06	12.70	10.00
07	14.70	12.00
08	16.70	14.00
09	18.70	16.00
10	20.70	18.00
11	22.70	20.00
12	24.70	22.00
13	26.70	24.00
14	28.70	26.00
15	30.70	28.00
16	32.70	30.00

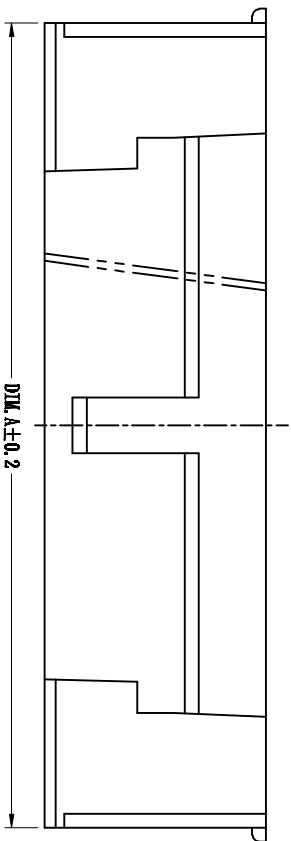

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL P/N: Nylon, UL94V-0 RATED COLOR White
2. DIW MARKED ... TO BE CHECKED BY QC
3. THE CAV. NO AND MARK 'N' IS LOCATED APPROXIMATELY AS SHOWN WITH MAX. HEIGHT 0.03 mm ABOVE SURFACE AND THE TEXT HEIGHT IS ABOUT 1.5 mm.
4. THE FOLLOWING CONDITION SHALL BE MET:
 - . FLASH: 0.03 mm THICK BY 0.05 mm MAX.
 - . EJECTION MARK: 0.10 mm MAX.
 - . MISMATCH IN PARTING LINE: 0.05 mm MAX.
 - . GATE PROTRUSION OR DEPRESSION: 0.05 mm MAX.

PHS - nY
 类型 (Type) _____
 线数: (Hole location) _____

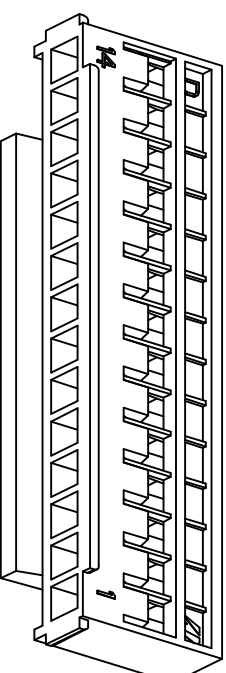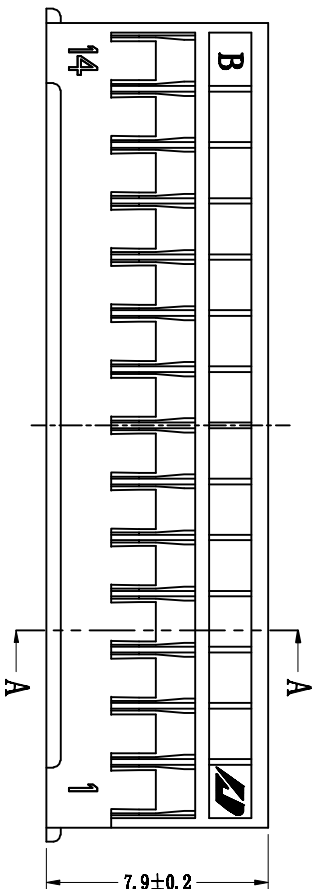

GENERAL TOLERANCE

SCALE	4=1
II. ± 0.40	III. ± 0.40
I. ± 0.25	.XII. ± 0.05
.X. ± 0.15	I. ° ± 2°
.XI. ± 0.08	.Y. ± 1°

UNIT: MM

CHECK

DATE

DWG. NO.

TITLE

REV.

SIZE: A4

APPROVE

DATE

PARTS NO.

PHS-nY

塑胶图

SHEET 1/1